

REST-GLOW

MANUFACTURING CO. LTD

MONTREAL

TORONTO

[BLANK PAGE]







Low absorption curved plastic panels

scientifically engineered louvre for maximum glare cut-off

TARLIT

the new fluorescent luminaire of beauty and distinction

Perfect in design excellent in lighting performance

STARLITE

with matched decorative rods and canopy

MATCHED ASSEMBLY FITTING



individual spotlight with matched cast en

TABLITE

.. with matched joiners in continuous mounting

The second

Joine


ARITH for highlighting and dramatic effects

... matches beautifully with ... matches beautifully with adjustable swivel - mounted spotlight

FINISH:

durable, hard baked GLOW-WHITE polymerized enamel
optional:
SILVERTONE baked alun
goldtone bronze
IVORY


ends:




MATCHED ASSEMBLY FITTINGS



DIMENSIONAL DATA





UTILIZATION FACTORS

Ceil- ing	P	75	it	Pe	50	t	Percent 30
Walls	50	30	10	50	30	10	30 10
Room		Co	effici	ent o	f Uti	lizatio	on
J	.24	.20	.17	.22	.18	.16	.16 .15
1	.30	.26	.23	.27	.23	.21	.21 .19
Н	.34	.30	.27	.30	.27	.24	.24 .22
G	.37	.33	.30	.33	.30	.27	.26 .25
F	.40	.36	.33	.35	.32	.29	.28 .27
E	.44	.41	.37	.39	.35	.33	.31 .30
D	.48	.44	.41	.42	.39	.36	.34 .33
C	.50	.47	.43	.43	.40	.38	.36 .34
В	.54	.50	.47	.46	.43	.42	.38 .37
A	.56	.52	.49	.48	.45	.43	.40 .38


NTABILIT			C . F .	-	*
STABLIT	10000	SPE	CIFI	LA	TIONS

MODE		LAMPS WATTS	Single unit	Two units with joiner	Single unit with 2 spots at ends	
STAR 4	20	2-20 w	12½" × 26½"	12½" x 51½"	12½" x 49"	12½"× 62%"
	20	4-20 w	15½" × 26½"	15½" x 51½"	15½" x 49"	15½"× 62%"
	40	2-40 w	12½" × 50½"	12½" x 99½"	12½" x 73"	12½"× 110%"
	40	4-40 w	15½" × 50½"	15½" x 99%"	15½" x 73"	15½"× 110%"

ı				
	SPOT B	basic spotlight	101/3" x 15"	15" x 15"
	SPOT CA	individual spotlight with 2 ends	1315" x 1215"	13½"× 15½"






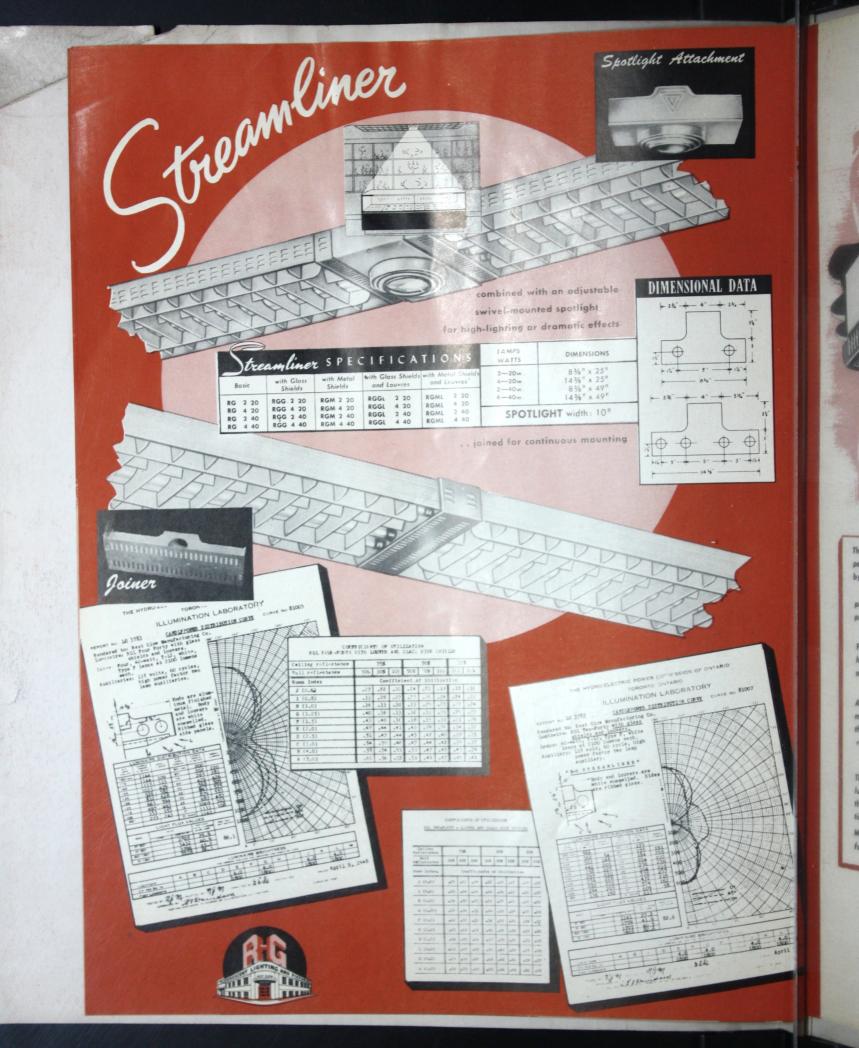



featuring the newly developed

CORNING curved PRISMATIC FLUR-O-GUIDE panels

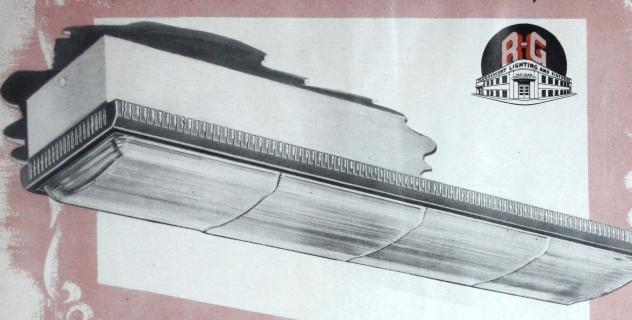

The curved, prismatic design of the FLUR-O-GUIDE panels controls the light output of fluorescent lamps by directing it into useful working areas:

AL DATA

The bottom prisms bend the light downward, while the side prisms illuminate the ceiling.

This bending feature of FLUR-O-GUIDE panels produces illumination of the highest efficiency, excellent shielding of objectionable glare and reduced brightness.

As a semi-recessed unit, LENSCRAFT lends itself to many modern architectural adaptations by installing the luminaire singly, in continuous lengths or in rarious patterns for lighting effects.

The perforated frame of the LENSCRAFT provides luminous background around the luminaire, softens the shadows—producing a decorative effect of distinction and beauty.

Maintenance factor is reduced to a minimum by the fully enclosed design of the LENSCRAFT luminaire.

Conflictence 1975 Solution Reflectance 1975 Solution Reflectance 1975 Solution So

FINISH:

body: durable, hard baked GLOW-WHITE polymerized enamel

ds: optional:
SILVERTONE baked alumin
goldtone bronze

LENSCRAFT SPECIFICATIONS

MODEL		LAMPS	DIMENSIONS		
LNS	4 20	4—20w.	101/4 x 6 x 24 1/4"		
LNS	4 40	4-40w.	101/4 x 6 x 48 1/4"		
LNS	8 40	8-40w.	1014 x 6 x 96 1/4"		

MODEL REC


- * Recessed unit for flush mounting
- ★ Ideal for low ceilings where surface fixtures are not feasible

basic unit

MODEL RECG

SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
REC - RECG - RECL 20	1-20w.	5 × 5 1/4 × 24 1/8"
REC - RECG -RECL 2 20	2-20w.	7 1/4 x 5 1/4 x 24 1/8"
REC - RECG -RECL 3 20	3-20w.	93/4 x 51/4 x 241/8"
REC - RECG -RECL 4 20	4-20w.	93/4 x 51/4 x 241/8"
REC - RECG - RECL 40	1-40w.	5 x 51/2 x 481/8"
REC - RECG - RECL 2 40	2-40w.	71/2 x 51/4 x 481/8"
REC - RECG - RECL 3 40	3-40w.	93/4 x 51/4 x 481/8"
REC - RECG - RECL 4 40	4-40w.	93/4 x 51/4 x 481/8"



With glass shield for light diffusion


MODEL RECL

 Ceiling
 75%
 50%
 30%
 30%
 30%
 10%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 30%
 10%
 80
 30%
 10%
 80
 30%
 10%
 80
 30%
 10%
 80
 30%
 10%
 80
 30%
 10%
 80
 30%
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30
 30

with louvre



MODEL MS

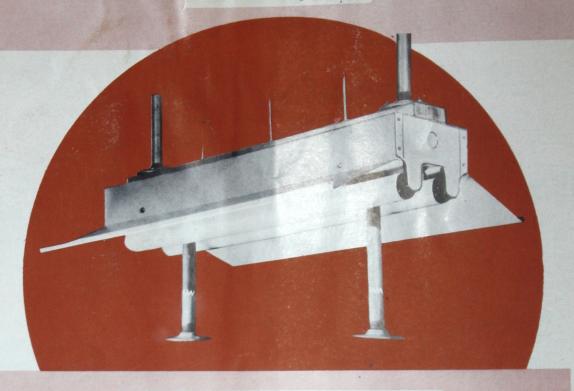

SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS	
MS 2 20	2—20w.	161/2 x 41/2 x 24"	
MS 2 40	2-40w.	161/2 × 41/2 × 48"	
MS 4 40	4-40w.	161/2 x 41/2 x 96"	

- Specially designed for use on sewing machine tables
- Extra wide reflectors slanted on angle which shields the light from the operators' eyes and provides shadeless and glarefree illumination on the tables
- * Each unit with a switch
- * Supplied with thread stands
- ★ Designed for continuous mounting installation direct on the tables with pipe supports








VCG VCG VCG VCG VCG VCG



MODEL NR





or with glass shields or with glass shields and louver

FINISH:

body: durable, hard baked GLOW-WHITE polymerized optional:
SILVERTONE baked aluminu
goldtone bronze
IVORY ends:

400 800


-	EFF	ICIE	412	Or	CIL	LIZA	110	T.
Ceiling		75%			501	%		30%
Walls	50%	30%	10%	50%	30%	10%	309	109
Room Index		UTI	LIZA	TIO	N F	ACT	ORS	
J	.25	.21	.18	.22	.19	.17	.18	.16
1	.31	,26	.24	.28	.24	.22	.22	.21
H	.34	.30	.28	.31	.27	.25	.25	.23
G	.38	.34	.31	.34	.50	,28	.28	.26
F	.40	.37	33	.36	.33	.30	.30	.28
E	.45	.41	.37	.40	.36	.34	.35	.31
D	.48	.44	.41	.42	.39	37	.36	34
C	.51	.47	.43	.44	.41	.99	.37	.35
В	.54	.50	.47	.47	.44	.42	.39	.38
٨	.56	.52	.49	.49	.46	.44	.41	.39

ADAPTABLE FOR:


SURFACE MOUNTING * CONTINUOUS WIRING CHAIN SUSPENSION * RODS AND CANOPY


MODEL NRL

MODEL	LAMPS	DIMENSIONS
NR 2 20 — NRL 2 20 NR 3 20 — NRL 3 20 NR 4 20 — NRL 4 20 NR 2 40 — NRL 2 40 NR 3 40 — NRL 3 40 NR 4 40 — NRL 4 40	2-20w. 3-20w. 4-20w. 2-40w. 3-40w. 4-40w.	7 ½ × 14 × 24 ¾ 7 ½ × 14 × 48 ¾ 7 ½ × 14 × 48 ¾ 7 ½ × 14 × 48 ¾



- ★ Neat, simple functional design
 Wide light distribution
 - * Stamped ends for socket protection
 - * All white baked enamel finish





Walls	50%	30%	10%	50%	30%	10%	30%	10%
Index		C	oefficie	nt of U	tilizatio	n		
1	0.29	0.23	0.20	0.27	0.22	0.19	0,21	0.19
1	0.36	0.31	0.27	0.33	0.28	0.26	0.27	0.25
H	0.40	0.35	0.32	0.37	0.33	0.30	0.31	0.28
G	0.44	0.39	0.35	0.40	0.36	0.33	0.34	0.31
F	0.47	0.43	0.38	0.43	0.39	0.36	0.37	0.34
E	0.52	0.48	0.44	0.48	0.44	0.40	0.41	0.38
D	0.56	0.51	0.47	0.51	0.47	0.44	0.44	0.42
c	0.59	0.54	0.50	0.53	0.50	0.46	0.46	0.44
B	0.63	0.59	0.55	0.57	0.53	0.51	0.49	0.47
A	0.66	0.61	0.58	0.59	0.55	0.53	0.51	0.49

30% 10% 30% 10% 9 0,21 0.19 0.27 0.25 0.31 0.34 0.31 0.41 0.38 0.41 0.42 0.40 0.49 0.47 0.49 0.47

S P E C I F I C A T I O N S


MODEL	LAMPS	DIMENSIONS
FC 2 15	2—15w.	51/2 × 4 × 191/4"
FC 2 20	2-20w.	51/2 x 4 x 251/4"
FC 3 20	3-20w.	7 x 5 x 25 1/4"
FC 4 20	4-20w.	101/4 x 5 x 251/4"
FC 2 40	2-40w.	51/2 x 4 x 491/4"
FC 3 40	3-40w.	7 x 5 x 49 1/4"
FC 4 40	4—40w.	101/4 x 5 x 491/4"

ADAPTABLE FOR:

- * SURFACE MOUNTING
- * CHAIN SUSPENSION
- * DECORATIVE RODS
 AND CANOPY


MODEL LM


- ★ Each lamp in individual curved reflector for highest efficiency
- ★ Stamped ends for socket protection with knockouts for continuous mounting
- ★ Hard baked white enamel finish

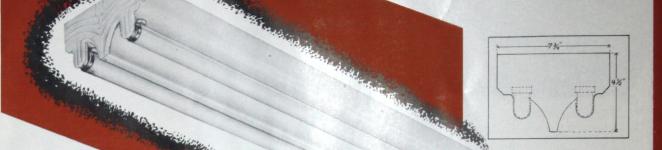

SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
LM 2 20	2—20w.	73/4 × 41/2 × 24
LM 3 20	3-20w.	73/4 x 41/2 x 24
LM 2 40	2-40w.	73/4 x 41/2 x 48
LM 3 40	3—40w.	73/4 x 41/2 x 48



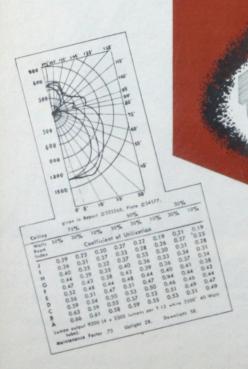

ADAPTABLE FOR:

SURFACE MOUNTING
CONTINUOUS WIRING
CHAIN SUSPENSION
RODS AND CANOPY



SPE(

MODEL SV 2 20 SV 3 20 SV 4 20

SV 2 40 SV 3 40 SV 4 40

1

A A

ADAPTABLE Flush or surfa





One of the most pleasing and attractive additions to our line Very smart cast ends of distinctive design

SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
SV 2 20	2—20w.	61/4 × 121/2 × 243/4"
SV 3 20	3-20w.	61/2 x 121/2 x 243/4"
SV 4 20	4-20w.	61/2 x 121/2 x 243/4"
SV 2 40	2-40w.	61/2 × 121/2 × 483/4"
SV 3 40	3-40w.	61/2 x 121/2 x 483/4"
SV 4 40	4-40w.	61/2 x 121/2 x 483/4"



ADAPTABLE FOR:

- * SURFACE MOUNTING
- + CHAIN SUSPENSION
- * DECORATIVE RODS AND CANOPY

MODEL W

ADAPTABLE FOR:
Flush or surface mounting

Specially designed for store window illumination Slanted construction concentrates the light on the merchandise displayed

MODEL	LAMPS	DIMENSIONS
W 2 20 W 3 20 W 4 20 W 2 30 W 3 30 W 4 30 W 2 40 W 3 40 W 4 40	2—20w. 3—20w. 4—20w. 2—30w. 3—30w. 4—30w. 2—40w. 3—40w.	7½ x 5 x 2 x 24" 10¼ x 5 x 2¼ x 24" 10¼ x 5 x 2¼ x 24" 7½ x 5 x 2¼ x 36" 10¼ x 5 x 2¼ x 36" 10¼ x 5 x 2¼ x 36" 7½ x 5 x 2¼ x 36" 7½ x 5 x 2¼ x 48" 10¼ x 5 x 2¼ x 48"

SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
BC 15	1—15w.	13/4" x 23/4" x 18'
BC 20	1-20w.	13/4" x 23/4" x 24
BC 30	1-30w.	13/4" x 23/4" x 36
BC 40	1—40w.	13/4" x 23/4" x 48





Stamped ends protect the sockets



SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
COR 15	1—15w.	5" x 5" x 18"
COR 20	1-20w.	5" x 5" x 24"
COR 30	1-30w.	5" x 5" x 36"
COR 40	1-40w.	5" x 5" x 48"
COR 2 40	2—40w.	5" x 5" x 48"
COR 3 40	3—40w.	71/2" x 71/2" x 48
COR 4 40	4—40w.	71/2" x 71/2" x 48

MODEL COR



Corner unit solves the problem of illumination for low ceilings where crossbeams prevent installation of centre fixtures



STRIP CHANNEL with knockouts on ends for continuous mounting



MODEL	LAMPS	DIMENSIONS	MODEL	LAMPS	DIMENSIONS
SCHK 15	1-15w.	2" x 3" x 19"	SCHK 3 20	3-20w.	2" x 9" x 25"
SCHK 20	1-20w.	2" x 3" x 25"	SCHK 4 20	4-20w.	2" x 9" x 25"
SCHK 30	1-30w.	2" x 3" x 37"	SCHK 2 40	2-40w.	2" x 5" x 49"
SCHK 40	1-40w.	2"x3"x49"	SCHK 3 40	3-40w.	2" x 9" x 49"
SCHK 2 20	2-20w.	2" x 5" x 25"	SCHK 4 40	4-40w.	2" x 9" x 49"


Ideal for side illumination of backgrounds displays, cove lighting, etc.


TR - TRL 34

Model TURRET featuring TWIN TURRET SOCKETS designed to the RLM specifications **OUTSTANDING FEATURES:** REFLECTOR: detachable, mounted on wingnuts, bent at 19 shielding angle LAMPS: spaced on 3½ inch. centres SOCKETS: the streamlined, positive-locking TWIN TURKET STARTERS: No-Blink, Reset FS-40 FINISH: hard baked white enamel inside and outside with reflection factor of 90% ADAPTABLE FOR: chain suspension, rod hangers, continuous mounting 52 0 72" with scientifically engineered hinged louvre UTILIZATION distribution curves TURRET 10% Parallel to Lamp Normal to Lamp .55 .60 .61 .55 .64 .63 .61 .67 .65 .66 .67 .71 MODEL LAMPS DIMENSIONS 1134 × 61/2 × 49" TR - TRL 240 2-40w. TR - TRL 340 TR - TRL 440 131/2 x 61/2 x 49" 3-40w. 4-40w. 17 × 61/2 × 49"

ion of

cove





- * Extra wide reflector
- ★ Stamped ends for socket protection



SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
C 15	1—15w.	9½ x 5½ x 18"
C 20	1—20w.	9½ x 5½ x 24"
C 30	1—30w.	9½ x 5½ x 36"
C 40	1—40w.	9½ x 5½ x 48"

- ★ Industrial unit with wide range of applications
- Detachable reflector for easy maintenance and access to all electrical components
- Stamped ends for socket protection with knockouts for continuous mounting



MODEL INC

SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
INC - INCL 2 20 INC - INCL 2 40	2—20w. 2—40w.	13½ x 6½ x 24" 13½ x 6½ x 48"
INC -INCL 3 40	3—40w. 4—40w.	16 x 6½ x 48" 18 x 6½ x 48"

MODEL INCL



MODE

MODEL KUS

MODEL KUF



SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
KUS 2 20	2—20w.	73/4 x 5 x 24"
KUS 3 20	3-20w.	73/4 x 5 x 24"

SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
KUF 2 20	2—20w.	6 ³ / ₄ × 4 × 24"
KUF 3 20	3—20w.	6 ³ / ₄ × 4 × 24"

A rich variety of designs to suit every taste

Smart and modern appearance

Ideal for planned kitchens, playrooms, bathrooms, home workshops, bedrooms, etc.

MODEL KUL

ntenance

on with

MODEL KU



SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
KUL 2 20	2—20w.	5½ x 4 x 24"
KUL 3 20	3—20w.	5½ x 4 x 24"

MODEL	LAMPS	DIMENSIONS
KU 2 20	2—20w.	9 x 41/2 x 26"
KU 3 20	3-20w.	9 x 4 1/2 x 26"

MODEL KUG

SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
KUG 2 20	2—20w.	71/4 × 51/2 × 24"
KUG 2 40	2—40w.	7 1/4 x 5 1/2 x 48"

- * Smart, pleasing design
- ★ Decorative glass shields provide glare-free, soft illumination





SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
KUGN 3 20	3—20w.	9 x 4½ x 33"

Ceramic glass shield with highly attractive floral design combines the effects of diffused light with direct illumination

MODEL

S P

BCF

ctive

MODEL BCF



MODEL BCG

* Wall or ceiling glass shielded bracket

SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
8CG 15	1-15w.	4% *** 18"
BCG 2 15	2-15w.	4% x 4 x 18"





- ★ Bracket with an adjustable reflector: for bathrooms, picture illumination, fitting rooms, mirrors, etc.
- ★ Adaptable for indirect lighting if used as ceiling fixture

★ Open type ceramic glass shielded bracket

SPECIFICATIONS

31 501	1100	
MODEL	LAMSP	DIMENSIONS
8CF 13 8CF 20	1-11- 1-20-	5 x 4% x 20" 5 x 4% x 20"

MODEL.	LAMPS	SIMENSIGNS
BRF 15	1-15w	475 x 375 x 1475*
BRF 30	1-95w	475 x 575 x 3475*
ERF 30	1-Mac	475 × 275 × 24/5"
ERF 4G	1-40w	475 × 575 × 44.75"



★ Two-toned bronze plated desk lamp

Extra large base with penholders

MODEL DK

MODEL HDK



- ★ Heavy cast base, column and ends
- ★ Hard baked brown crinkle finish


SPECIFICATIONS

MODEL	LAMPS	DIMENSIONS
H DK	1—15w.	9 x 15 x 18 ½"
DK	1—15w.	9 x 15 x 18 ½"
PDK	1—15w.	9 x 15 x 18 ½"

- ★ Very smart cast ends of distinctive design
- ★ Twotone bronze plated ornamental cast ends

MODEL





Neat, smart design for modern homes: solves the problem of reading in bed Optional brown or ivory baked crinkle

* finish


MODEL	LAMPS	DIMENSIONS
BD 14	1—14w.	4½ × 2½ × 15"
BD 15	1—15w.	4½ × 2½ × 18"

MODEL CIR

design plated

MODEL CIRG

Vertical unit with lamps placed in a circle, solves the problem of illumination in places where the usual fixtures are not suitable: halls, lobbies, churches, etc.

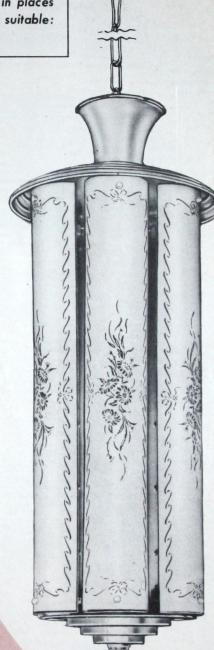

Open type



with ceramic glass shields

MODEL	LAMPS	DIMENSIONS	
CIR 4 20 - CIRG 4 20		13½ x 35½	
CIR 6 20 - CIRG 6 20	6-20w.	10/1 2 05/1	

MODEL CIRCLE



The newest addition to the fluorescent family

Economical: uses only 32-watt lamp

Splendid possibilities for home illumination

MODEL CIRCLE"G"



with Ceramic glass shield



MODEL	LAMPS DIMENSIONS	
CIRCLE	1-32w.	14" DIAMETER

MODEL SHOW

- Showcase unit
- Neat, inconspicuous for illumination of glass showcases, cupboards, etc.
- Dimensions kept at the minimum
- Available in two models:

SHOW A

Only lamps and sockets are in the fixture; ballasts and starters in a special separate box for installation elsewhere; fixture can be connected with the box with conduit or tubing (not supplied)

or SHOW B

Ballasts and starters built-in into the fixtures alongside of the lamps

SHOW A


SHOW B

SHOW SPECIFICATIONS

		DIMENSIONS	
MODEL	LAMPS	SHOW A	SHOW B
SHOW 15	1—15w	17/6" × 23/4" × 20"	2" x 23/4" x 23 %"
	1-30w.	17/8" x 23/4" x 38"	2" x 23/4" x 48"
SHOW 30	2—15w.	17/8" × 23/4" × 40"	2" x 23/4" x 48"
SHOW 2 15	2—30w.	17/8" x 23/4" x 76"	2" x 23/4" x 96"
SHOW 2 30		17/8" x 23/4" x 57"	2" × 23/4" × 72"
SHOW 3 15	3—15w.		


In addition to the above standard sizes, model SHOW can be made in any length according to the specifications



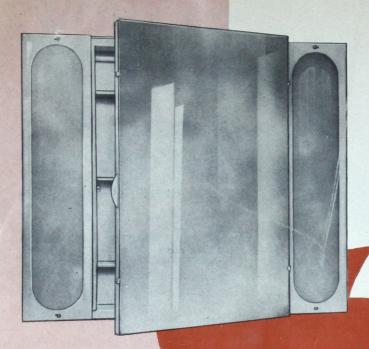

All steel cabinet with built-in fluorescent fixtures for recessed installation

- ★ Uses four 20-watt fluorescent lamps: two on each side of the mirror
- ★ Two SKYTEX glass diffusing panels
- ★ Light output: over 50 foot/candles at 30 inch
- * All white hard baked enamel finish

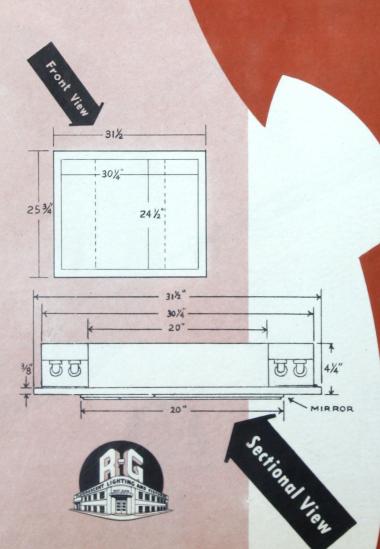



FLUORESCENT BATHROOM CABINET [BLANK PAGE]



CCA

All our fixtures carry the approval label of the Canadian Standards Association. All the auxiliaries and component parts are guaranteed by their manufacturers for a specified length of time; if found defective within this period, they will be replaced by us free of charge, providing they are returned prepaid to our factory. Price lists sent upon request. We reserve the right to cancel or to reject any order. Credit extended when rating or references are satisfactory; otherwise: 25% with the order and balance C.O.D. WE ARE NOT RESPONSIBLE FOR THE DAMAGES IN TRANSIT; all claims should be filed with the Transportation Co. No merchandise may be returned without our permission in writing.